




## Reticle

**FC-6c™**

**Available in:**  
NX6™ 1-6x24mm

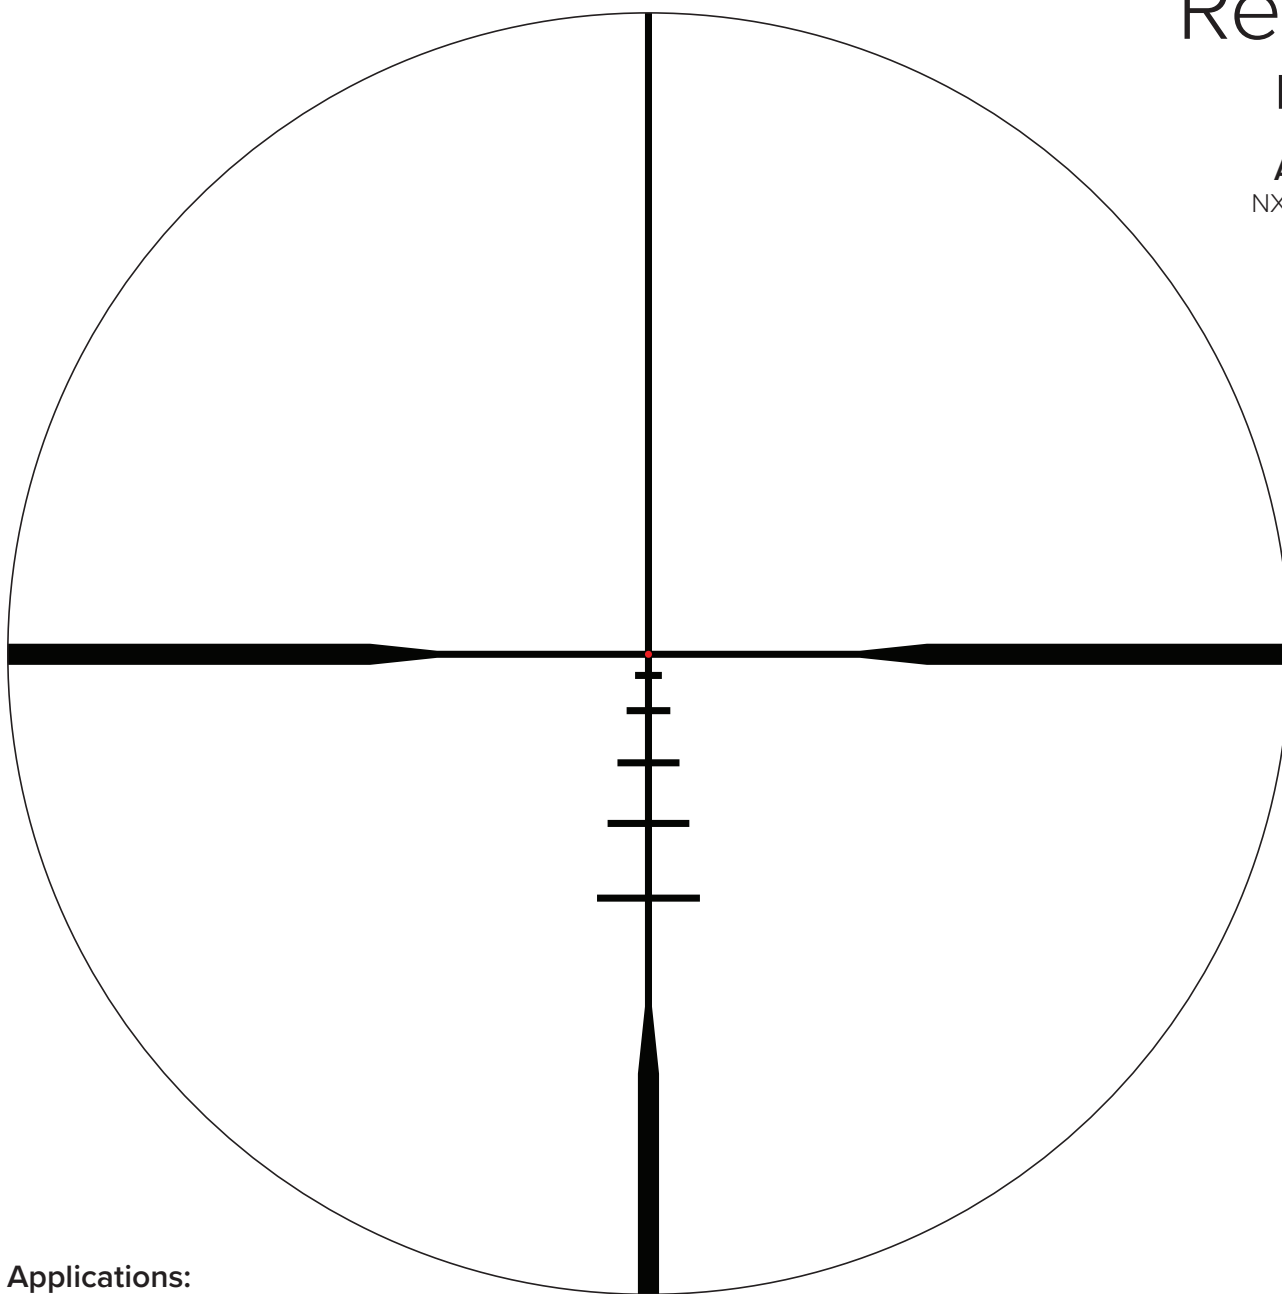

### Applications:

- Competition
- Field / Tactical
- Duty

### Features:

- Bullet Drop Compensating (BDC) reticle design
- Optimized for heavy/match .223/5.56 loads
- Daylight bright illuminated center dot



# Reticle

## FC-6c

The FC-6c™ is the premier reticle for multi-gun competitions, where speed and accuracy are paramount. Optimized for heavy .223/5.56 loads, the FC-6c features an easy-to-use and understand Bullet Drop Compensating (BDC) design. When using a 100 yard zero, the BDC subtensions allow for accurate elevation holds to 600 yards with left and right 5 mph windage references. The brightly illuminated center dot provides an unmistakable aim point during all shooting conditions.

Reticle Subtensions*					
FC-6c					
A	.5MOA	B	.5MOA	C	1.5MOA
D	30MOA	E	25MOA		


\*All subtensions measured at maximum magnification

BDC Specifications		
Nominal Yardage**	Elevation	Windage (Left or Right)
100	N/A	N/A
200	1.5MOA	.95MOA
300	4MOA	1.55MOA
400	7.7MOA	2.2MOA
500	12MOA	2.9MOA
600	17.3MOA	3.65MOA

\*\*Distance markings are not shown in the actual reticle. Nominal Yardages may not match every firearm and cartridge combination (check with a ballistic calculator).

# NIGHTFORCE®

Nightforce Optics, Inc.  
336 Hazen Lane / Orofino, ID 83544  
Phone: 208.476.9814 / [www.nightforceoptics.com](http://www.nightforceoptics.com)  
[info@nightforceoptics.com](mailto:info@nightforceoptics.com)

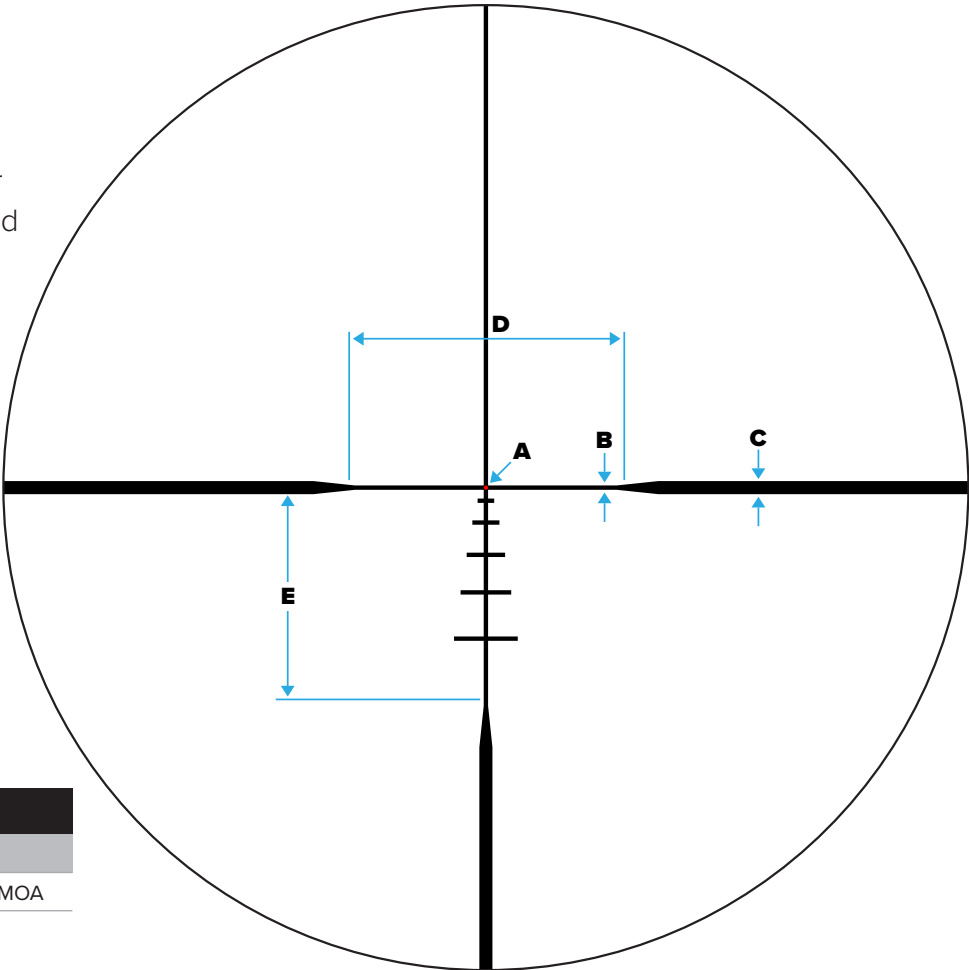

### BDC Specifications

